

(+48) 32 453 91 70

info@pol-eko.com.pl

in

www.pol-eko.com.pl

POL-EKO A.Polok-Kowalska sp.k.
 44-300 Wodzisław Śląski
 ul. Kokoszycka 172 C

Data sheet

Climatic Chamber KKS 750 Smart PRO



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Advantages of the SMART PRO controller:

- large (7"), clear, full colour touch screen
- LAN, USB ports and WiFi for communication and data transfer
- multi-segment time and temperature programs
- overview of data in tabular and graphic form
- visual and sound alarm
- Admin function for management
- password protected log-in
- internal memory for programs and data storage
- event registry with user notifications
- LabDesk software and user manual for direct download



Smart PRO - preview screen








POL-EKO A.Polok-Kowalska sp.k. 44-300 Wodzisław Śląski ul. Kokoszycka 172 C

TECHNICAL DATA				
air convection	forced			
chamber capacity [I]	749			
working capacity [I]	749			
controller	microprocessor PID			
display	7" full colour touch screen			
TEMPERATURE AND HUMIDITY				
temperature range [°C]	0+100			
temperature resolution every [°C]	0,1			
temperature variation at 25°C and 60%rH [+/-°C]*	2,0			
temperature protection	class 3.3 to DIN 12880			
relative humidity range [%]	1090 (see chart for details)			
humidity resolution every [%]	1,0			
humidity variation at 25°C and 60% rH [%rH]	5,0			



obszar pracy krótkotrwałej (max.24 h) short-term work area (max. 24h)

Wilgotność względna / Relative humidity [%]

CHAMBER		
door type	double (external solid, internal glass) / external glass (option)	
interior		
Smart PRO	acid-proof stainless steel to DIN 1.4301	
IG Smart PRO	acid-proof stainless steel to DIN 1.4301	
housing		
Smart PRO	powder coated sheet	
IG Smart PRO	stainless steel linen finish	
- Sindict No	Statiness steet men misit	






(+48) 32 453 91 70info@pol-eko.com.plwww.pol-eko.com.pl

POL-EKO A.Polok-Kowalska sp.k. 44-300 Wodzisław Śląski ul. Kokoszycka 172 C

overall dims [mm] /1/	
width A	1270
height B	2010
depth C	990
internal dims [mm]	
width D	1040
height E	1200
depth F	600



shelves (standard max)	5 16	
- reinforced shelf version (PW) [kg] /3/	100	
max unit workload [kg]	140	
weight [kg]	275	
ELECTRICAL PARAMETERS		
voltage**	400V 50-60Hz	

 voltage**
 400V 50-60Hz

 nominal power [W]
 4250


 refrigerant
 R290 / GWP=3

 warranty
 24 months

all the above technical data refer to standard units (without optional accessories) and without a reverse osmosis system

- * variation (K) calculated for chamber as: K= +/- (T average max. T average min.) / 2
- $\ensuremath{^{**}}$ other power supplies on request
- 1 depth doesn't include 50 mm of power cable
- 2 on uniformly loaded surface
- 3 reinforced shelf

OPTIONS AND ACCESSORIES

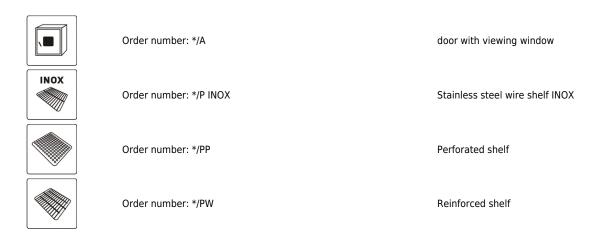









	Order number: KUW GN*/*	Stainless steel cuvettes
	Order number: GNZ	Internal socket
>0	Order number: BRT/*/L or IQ/OQ/PQ	Calibration and IQ, OQ, PQ qualification
4	Order number: BPP 12	Battery backup for display
ALAF	— I Ouden acceptant DODT ALADM	Dry alarm contact
LAN	Order number: LANK	LAN cable
20mr		Non-standard access port 20 mm
30mr	Order Hamber: Gez/30	Additional access port 30 mm
60mr		Non-standard access port 60 mm
	Order number: OCZ/100	Non-standard access port 100 mm



100mm

 $\left(\!\!\left((\,\bullet\,)\right)\!\!\right)$

Order number: KD

Access control