

Technical Data Sheet



High Performance Plasma Freezer

Revision-0

Thermo Fisher Scientific, Asheville, North Carolina

Specifications	Catalog number
	TSX3030LV
	Model Number
	TSX3030LV
Application, Rating and Electrical Data	
Application	Plasma Freezer
Storage Volume	827 Liters / 29.2 Cubic Feet
Factory Set Point	-30°C
Set Point Range/Adjustable Increment	-35°C to -15°C / 0.1°C
Electrical Power / Rated Current	208-230V 50 Hz 1 Phase / 7.0A
Building Supply Rating	15A dedicated grounded non-GFCI circuit. Protected by circuit breaker rated for inductive loads
Power Plug/Power Cord Length	16 Amp (CEE 7/7) / 3.048 Meters (10 feet)
Agency Listings	CE, UL, cUL, FDA
Indoor/Outdoor Usage	Indoor Use Only
Application Environment	Non-Corrosive, Non-Flammable, Non-Explosive, Good Air Ventilation
Ambient Operating Temperature	15° C - 32° C (60° F - 90° F)
Refrigeration Configuration	
Refrigeration System	Vapor compression system
Compressor / Number / Capacity	Hermetic Variable Capacity Compressor / 1 / 672W
Condenser Type/Number	Enhanced Finned-Tube and Forced-Air Cooled / 1
Expansion Device	Capillary Tube
Evaporator Type / Defrost Method	Forced Air Evaporator Coil / Automatic Defrost
Refrigerant Charge / Flammability	R290, 130gms, GWP:3 ODP:0 / Flammable
Controller/Electrical System Configuration and Features	
Controller Level	Eye Level
Power Switch	Keyed Off-On - Alarm
Controller Type	IntrLogic Control System: Digital display, Graphic thermometer, Automatic defrost system
Setpoint Security / Programmable	Yes / Yes
Compressor Safe Guard	Current protection
Control Sensor	Single RTD (1000 ohm shielded Platinum RTD)
Connectivity / Remote Outputs	Standard
Adjustable Warm / Cold Alarms	Fully Adjustable
Power Failure Alarm	Standard
Electronic Chart Recorder	Standard
Dimensions and Construction	
Interior Dimensions (D x W x H)	72.3 cm x 76.2 cm x 147.3 cm (28.5" x 30.0" x 58.0")
Exterior Dimensions (D x W x H)	96.2 cm x 86.4 cm x 199.4 cm (37.9" x 34.0" x 78.5")
Insulation	5.08 cm (2.0") High-Density Water-Blown Polyurethane Foam
Door Perimeter heater	Yes
Shelves / Load Limit	(7) Drawers Adjustable In 1" Increments. Max. Cap. per Drawer: 27 kg (60 lbs.)
All-Direction Casters	Standard with Locks
Shipping Weight	252 kg / 556 lb

Typical Performance Characteristics

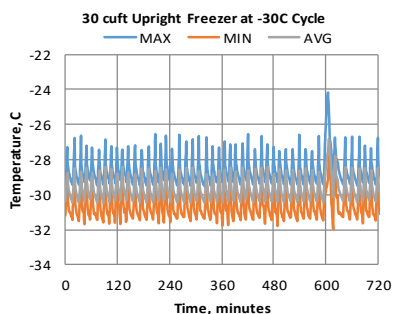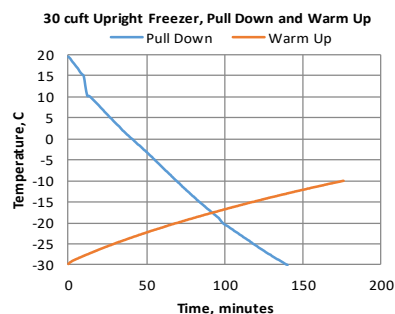

Test Unit Series Number or MSO Number:	19758-A-8-2
Cabinet Load:	Unloaded
Average Cabinet Temp at -30C Cycle (C):	-29.6
Peak Variation from Setpoint (C):	+5.9 / -2
Uniformity (C):	2.1
Stability (C):	4
1-min Door Opening Recovery to -30C (min):	18
Duty Cycle at -30C (%):	72
Cycle (on/off) rate at -30C (min):	11 / 4
Energy Consumption (kw-hr/day):	8.8
Heat Rejection Rate (btu/hr):	1254
Pull Down Time (to -30C) (min):	141
Warm Up Time (-30C to -10C) (min):	176
Sound (dBA):	52

- Performance is nominal and individual units may vary.
- Product performance will differ due to product amount, product size and operating conditions.
- Continuous product enhancements may, without notice, result in amendments or omissions to this specification. Thermo Scientific cannot accept responsibility for damage, injury, loss or expenses resulting from misapplication of the information herein.

Typical Cabinet Temperature Map Freezer 30cuft , 7 Drawers, Single Outer Door

Temperatures are averages during > 20
cycles after reaching a setpoint of -30C


Top View of Shelves

M3	M4
M1	M2
M5	
M10	
M15	
M18	M19
M16	M17
M20	
M25	
M30	
M33	M34
M31	M32
M35	

REAR

FRONT

Front View

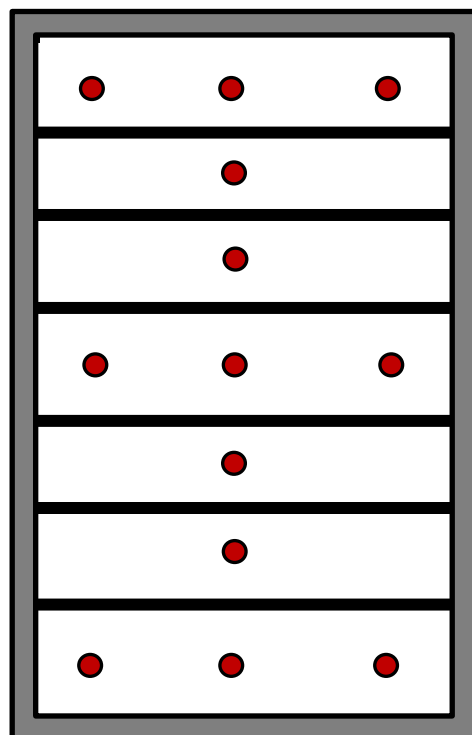

19758-A-8-2

	M1	M2	M3	M4	M5
Avg	-29.8	-29.7	-30	-29.9	-30.1
Max	-24.2	-24.2	-24.5	-25.2	-25.2
Min	-31.3	-31.1	-32	-31.5	-31.7
	M10	M15			
Avg	-30.2	-30.2			
Max	-27.4	-27.5			
Min	-30.9	-30.8			
	M16	M17	M18	M19	M20
Avg	-29.9	-29.9	-30.1	-29.9	-29.8
Max	-27.5	-27.3	-27.4	-27.6	-27.8
Min	-30.6	-30.5	-30.8	-30.5	-30.4
	M25	M30			
Avg	-29.5	-29.2			
Max	-27.8	-27.4			
Min	-30	-29.7			
	M31	M32	M33	M34	M35
Avg	-28.8	-28.9	-29.1	-29.3	-28.9
Max	-26.7	-26.7	-26.6	-26.6	-26.6
Min	-29.5	-29.6	-30	-30.2	-29.7

Cabinet Average: -29.6 C

Probe Average: -29.5 C

Peak Variation: +5.9 C / -2.0 C

thermo scientific

ONLY CABINET SHOWN FOR CLARITY IN TOP VIEW,
TO ILLUSTRATE INTERIOR DIMENSIONS




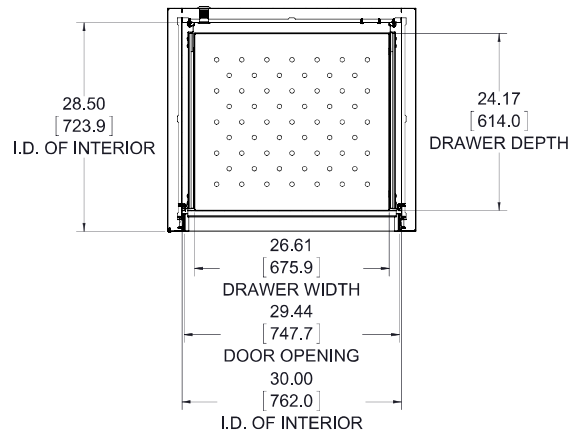


CHART RECORDER

SECTION A-A

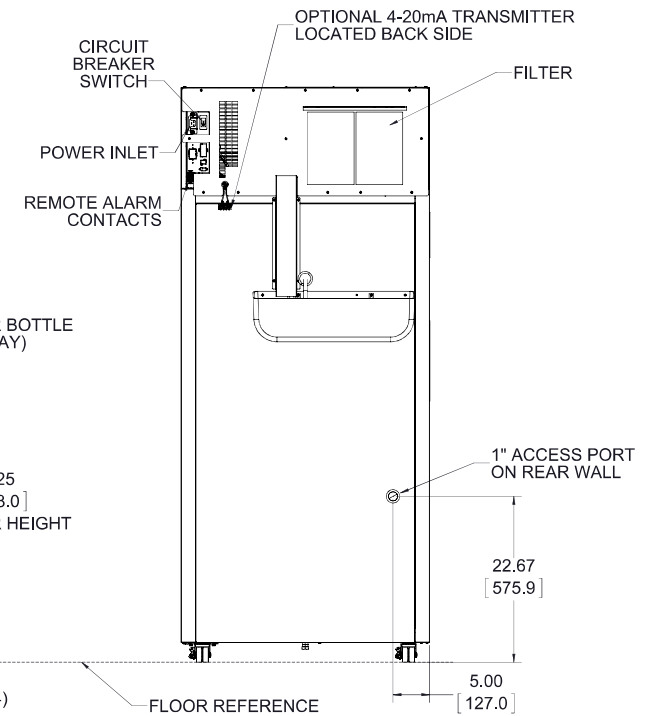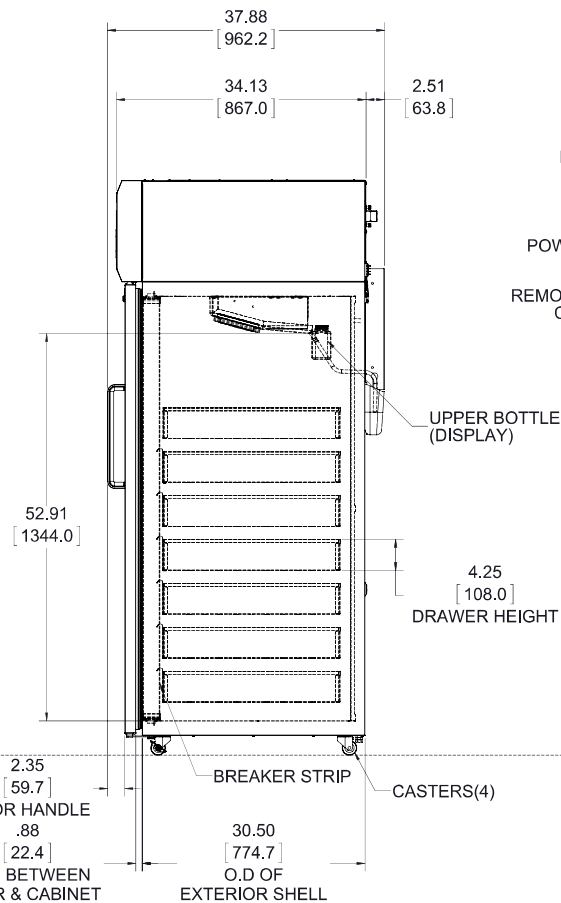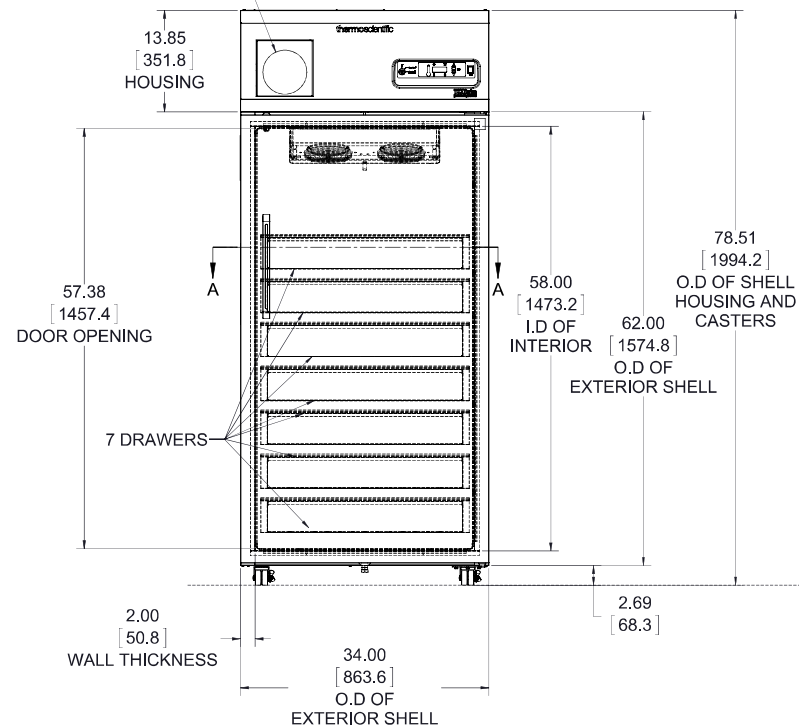

NOTE: DUAL DIMENSION IS INCHES OVER MILLIMETERS
DO NOT USE FOR ENGINEERING PURPOSES. SUBJECT TO CHANGE WITHOUT NOTICE.

30 cu. ft. Plasma Freezer
7 Drawers
Single Outer Door
Top Mount Controls

327839G16_ra